
## Hot Water (low & high temperature) and Steam Boilers for Bio and Solid Fuels

Shell & Tube, Panel-wall and Water Tube Boilers up to 24MW, 40 ton/h and 86 bar-g







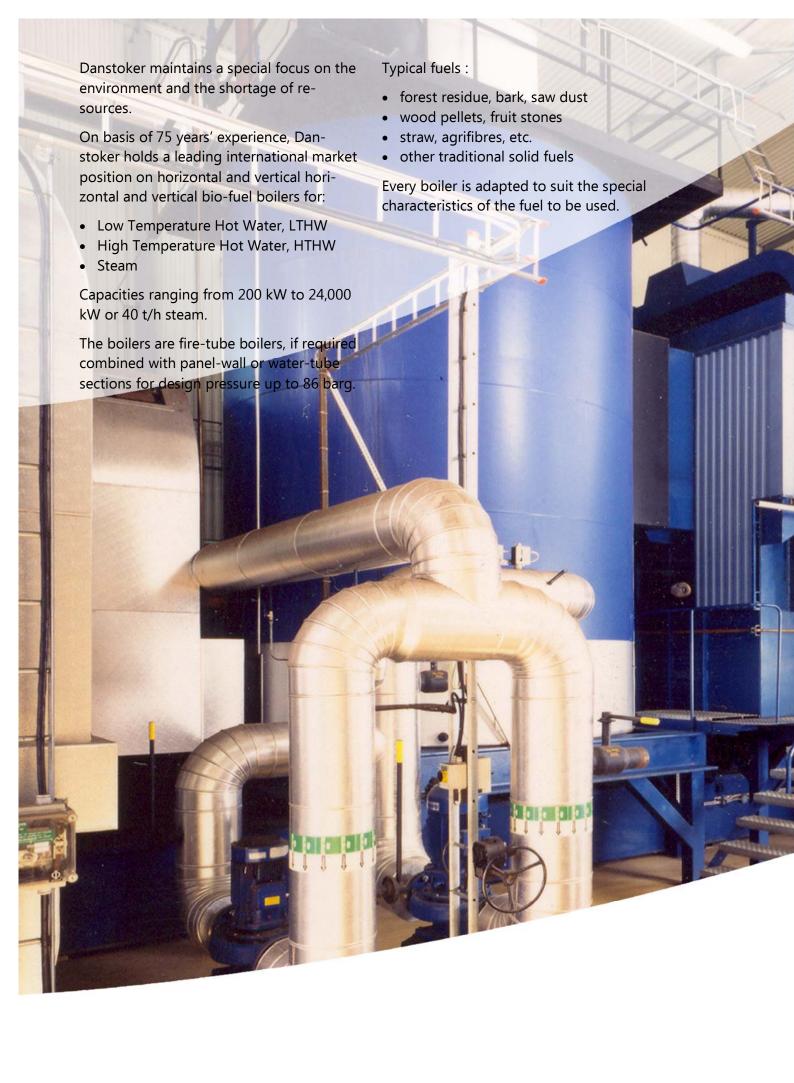





The very best result is achieved in a close cooperation between Danstoker and the world's leading suppliers of combustion and fuelhandling equipment.

The boilers are designed acc. to the customer's needs for heat or process heat, in order to optimize the utilization of the resources available.

The boiler types would be:

- Directly fired 3-pass furnace and fire-tube boiler with closed combustion chamber, if required combined with panel-wall or water-tube sections.
- Directly fired "open bottom boilers", with a panel wall radiation section and fire-tube convection section. The boilers are placed on top of a combustion grate, possibly with a water-cooled bottom part.
- The boilers could be combined with a vertical convection section. A by-pass may be integrated to secure a constant exhaust gas temperature.
- Indirectly fired boilers for utilization of the energy from furnaces, kilns, incineration or gasification.
- 3-pass or multi-pass horizontal or vertical convection boilers intended for heat recovery after kilns/incineration ovens.

The boilers would typically be equipped with Danstoker's automatic chock blast cleaning: type Danblast.




Danstoker focuses on environmental awareness and the shortage of resources



The development and manufacture of high-performance oil and gas boilers for the energy sector has made Danstoker known as one of Europe's leading boiler-makers, featuring a wide range of shell and tube boilers with capacities ranging from 800 to 50,000 kW or 0,2 to

55 ton/h steam up to 40 barg and superheated unto 450°C.

Special boilers as combined watertube-radiation section with a firetube convection section until 50MW, 55 ton/h steam at max. 86 barg and superheated unto 500°C.



During the last decades Danstoker has delivered more than 2500 exhaust gas boiler on a world-wide scale. The boilers are mounted after gas or diesel engines.

Design and development of special boilers and economisers for heat recovery of hot flue gases originating from chemical and industrial pro-cesses. The waste heat is recovered in single, double or triple pass boilers, provided with low-temperature economisers or with integrated superheaters in the steam boilers. Capacities until 35 MW, 55 ton/h Steam.



The service staff in the Danstoker after-sales division has many years of experience within a broad variety of jobs regarding energy-technical plants, thereby enabling them to provide quick and efficient service on Danstoker boilers as well as on boilers of other makes.

As we are often already acquainted with the plants, we are able to quickly conduct the necessary adjustments and/or repairs.



One of the greatest challenges that the World is facing within this decade will be to encourage market players to act in a way so as to protect and improve the environment.

At Danstoker we are of the firm belief that there are no conflicting interests between economic development and environment-protection – we must have a common goal now and for the future generations.

Danstoker has elaborated upon their own Environment Charter, based on the Environment Charter of the ICC: "The Business Charter for Sustainable Development - 16 principles".

